


Panel Meter

Moving Coil Meter



Specifications:

Movement	: Moving coil type
Measuring Range	: 90°
Pointer	: 0.4m/m
Pointer Colour	: Red/Black
Pointer Position	: Left zero hand
Scale	: Aluminium
Coil Resistance	: 1500Ω ±10%
Current Sensitivity	: DC 100uA ±2.5%
Friction Tolerance	: ±0.4m/m
Balance	: Within the pointer width ±0.4m/m vertically and horizontally
Over Current	: Within 5 items of rate current
Operation Temperature	: Between -20°C and +60°C
Zero Position Difference	: Within width of pointer
+ Terminal	: Right side when seen from front

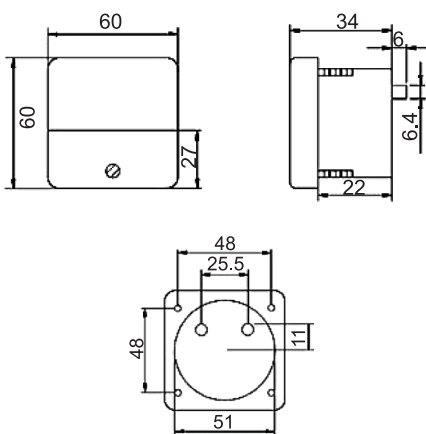

Specification Table

Type	Full Scale Deflection	Case Dimension	Part Number
Ammeters	100µA	60 × 60	SD60/0-100UA
	1mA		SD60/0-1MA
	20mA		SD60/0-20MA
	5A		SD60/0-5A
	10A		SD60/0-10A
	15A		SD60/0-15A
	30A		SD60/0-30A
Voltmeters	50A	SD60/0-50A	
	15V	SD60/0-15V	
	30V	SD60/0-30V	

Dimensions : Millimetres